



Charmo 19

Ductless Single Zone Air-Conditioner



Performance up to



Cooling

Up to



Features

Operation mode
Nominal capacity
Voltage
Indoor unit

Outdoor unit

Connection piping

Control

Warranty

Application

- Cooling, dehumidifying, fan and auto.
- 9000, 12000, 18000, 24000 BTU/hr.
- 230/208V, 60 Hz, 1-phase.
- High wall installation, dual side connection.
- Plastic housing, standard white.
- 7-speed cross-flow fan (auto, turbo, high, medium-high, medium, low and very low).
- Washable filters.
- Variable speed rotary compressor (INVERTER), with overload protection.
- Electronic expansion valve for precise control of refrigerant flow.
- Condenser fins covered with a hydrophilic coating for improved corrosion resistance.
- Large diameter quiet axial-flow fan for more efficient heat exchange.
- Smart pan heater to prevent ice formation.
- Minimum piping length of 10 ft. (3 m).
- Flared connections.
- Wireless remote included.
- Wired wall controller available.
- Wi-Fi.
- Set temperature: 16 to 30 °C (61 to 86 °F).
- Temperature display format: °C or °F.
- **10+2 year parts and 10+2 year compressor basic warranty (labor not included).***
- Dining room-kitchen, living room, family room, commercial building, office building, condo, restaurant.

Includes



Optional



*10 year standard warranty. Additional 2 year extended warranty when product is registered and/or proof of installation


Models

Product # ¹	Indoor Unit		GWC09ATCXB-D3DNA4A/ GWC09ATCXB-D3DNA1A/O	GWC12ATCXB-D3DNA4C/ GWC12ATCXB-D3DNA1C/O	GWC18ATDXD-D3DNA4A/ GWC18ATDXD-D3DNA1A/O	GWC24ATEXF-D3DNA4E/ GWC24QEXF-D3DNC4C/O
	Outdoor Unit					
Qty						
Technical Performance						
Voltage		Volts	230/208	230/208	230/208	230/208
Cooling capacity	Nominal	W (BTU/hr)	2667 (9100)	3517 (12000)	5159 (17600)	6450 (22000)
	Min. – max.	W (BTU/hr)	820 - 3018 (2800 - 10300)	700 - 3700 (2388 - 13307)	1100 - 5850 (3753 - 19960)	2000 - 7400 (6824 - 25249)
Used cooling power input	Nominal	W	805	1334	1750	1896
	Min. – max.	W	180 - 1350	180 - 1500	200 - 2300	340 - 2350
Used rated input		W	1450	1650	2300	2400
Rated current		A	6.5	6.7	9.5	12
MCA		A	9	11	14	15
Max. over-current protection (MOCP)		A	15	15	20	20
SEER2 (SEER)		-	19.5 (19.5)	17.5 (17.5)	17.5 (17.5)	18 (18)
EER		W/W	3.30	2.64	2.95	3.40
ENERGY STAR		-	-	-	-	-
Indoor Unit						
Dehumidification		pt/hr (l/hr)	1.69 (0.80)	2.96 (1.40)	3.8 (1.80)	5.28 (2.50)
Air flow volume		cfm	353 / 282.5 / 264.8 / 229.5 / 211.86 / 194.2 / 158.8	424 / 353 / 324 / 277 / 247 / 224 / 182	618 / 512 / 471 / 436 / 395 / 336 / 283	677 / 588 / 559 / 500 / 471 / 441 / 412
Sound level		dB (A)	51 / 47 / 44 / 42 / 41 / 38 / 36	57 / 49 / 48 / 45 / 43 / 42 / 37	60 / 56 / 54 / 52 / 50 / 46 / 42	61 / 57 / 55 / 52 / 50 / 48 / 46
Fan motor power output		W	20	15	45	60
Fan motor RLA		A	0.30	0.40	0.70	0.45
Deflector stepper motor power output		W	1.5	1.5	2.5	2.5
Net weight		lb (kg)	19.8 (9)	19.8 (9)	28.7 (13)	33 (18)
Outdoor Unit						
Air flow volume		m ³ /hr	1950	1950	2520	3200
Sound level		dB (A)	51	52	57	57
Compressor power input		W	756	857	1295	1330
Compressor LRA		A	-	-	25	35
Compressor RLA		A	5.20	7.30	9.35	10.45
Fan motor power output		W	30	30	30	60
Fan motor RLA		A	0.4	0.6	0.9	0.6
Refrigerant volume (R410A)		oz (g)	24.7 (700)	27.5 (750)	44.1 (1150)	52.9 (1500)
Net weight		lb (kg)	56.22 (25.5)	57.33 (26)	71.70 (32.5)	97 (44)
Operating ambient temperature	Cooling	°C (°F)	-18 to 46 (0 to 115)			
Connection Piping/Refrigerant						
Pre-charge length		ft. (m)	25 (7.5)	25 (7.5)	25 (7.5)	25 (7.5)
Additional refrigerant charge		oz/ft. (g/m)	0.2 (20)	0.2 (20)	0.2 (20)	0.5 (50)
Liquid pipe outer diameter		in.	1/4	1/4	1/4	1/4
Gas pipe outer diameter		in.	3/8	3/8	1/2	5/8
Maximum height difference		ft. (m)	66 (20)	66 (20)	66 (20)	66 (20)
Maximum total length		ft. (m)	66 (20)	66 (20)	82 (25)	82 (25)


¹ 1 indoor unit and 1 outdoor unit. Note that each unit is individually packaged.

Capacity Variation Ratio According to Temperature


GWC09 & GWC12

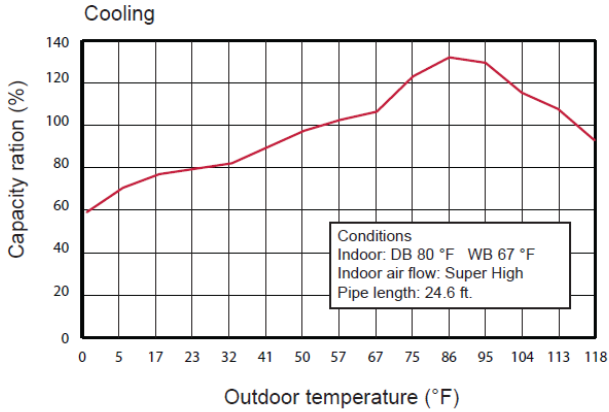


GWC18

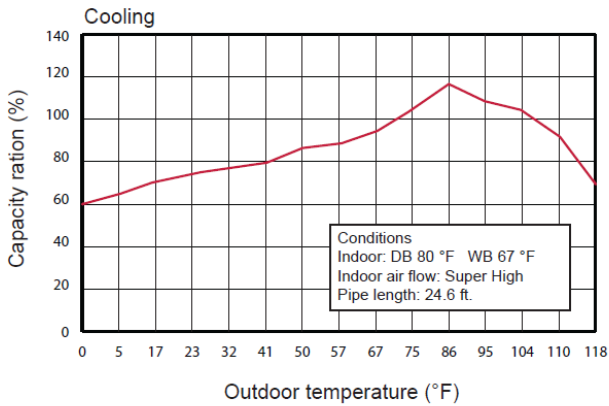


GWC24

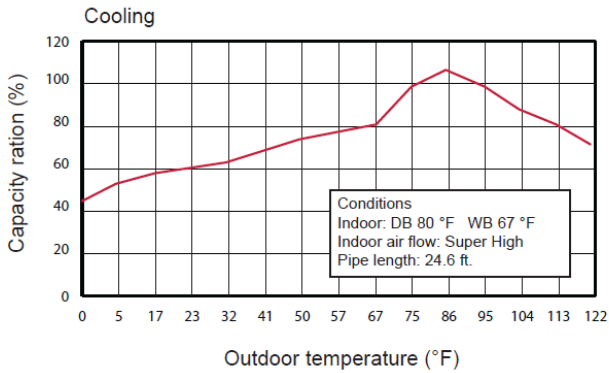

Indoor Unit

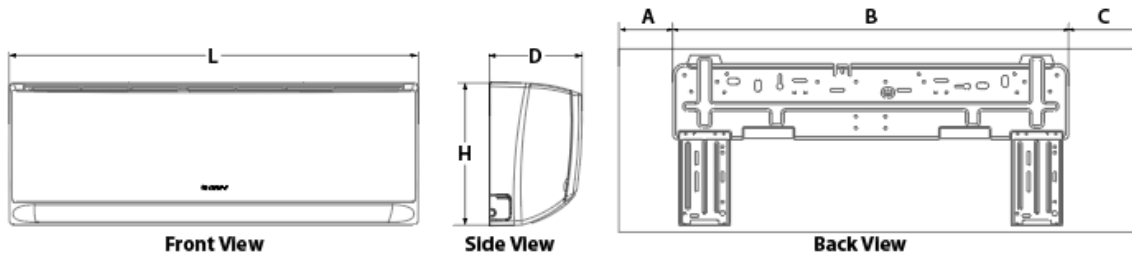

Outdoor Unit

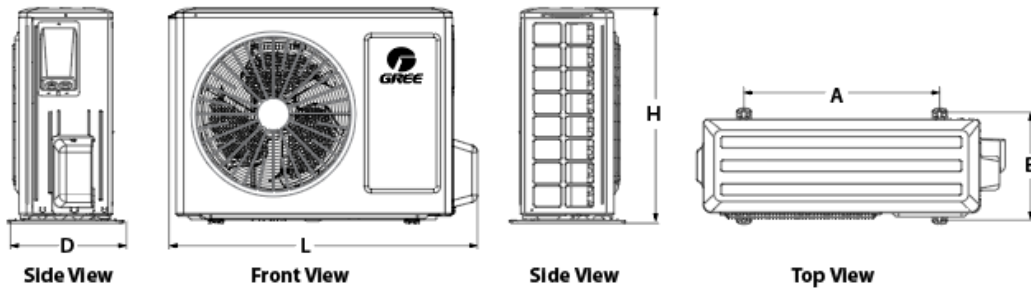

Indoor Unit	L		H		D		A		B		C	
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
GWC09ATCXB-D3DNA4A/I GWC12ATCXB-D3DNA4C/I	32 7/8	835	10 7/8	275	7 7/8	200	7 1/16	119	18 5/32	542	7 11/16	184
GWC18ATDXD-D3DNA4A/I	37 1/8	943	13 1/8	333	9 11/16	246	7 17/32	102	22 1/16	686	7 1/2	183
GWC24ATEXF-D3DNA4E/I	42 7/16	1078	13 1/8	333	9 11/16	246	10 3/16	206	22 1/16	686	10 5/32	186

Outdoor Unit	L		H		D		A		B	
	in.	mm	in.	mm	in.	in.	mm	in.	mm	in.
GWC09ATCXB-D3DNA1A/O GWC12ATCXB-D3DNA1C/O	28 13/16	732	21 54/64	555	13	330	17 15/16	540	12 3/16	286
GWC18ATDXD-D3DNA1A/O	31 37/64	802	21 54/64	555	13 50/64	350	20 5/32	559	13 2/32	364
GWC24QEXF-D3DNC4C/O	37 3/4	958	26	660	15 53/64	402	22 13/32	610	14 19/32	395

Specifications may change without prior notice

Project:	Approval Information
Consultant Engineer:	
Electrical Contractor:	
Distributor:	
Date:	
Contact at Dettson:	
Comments:	