

Series


FXD ACD

Performance up to

COOLING	Temperatures	SEER2
	- 15°C 5°F	17

HEATING	Temperatures	HSPF2
	- 30°C - 22°F	9

Central Heat Pump System

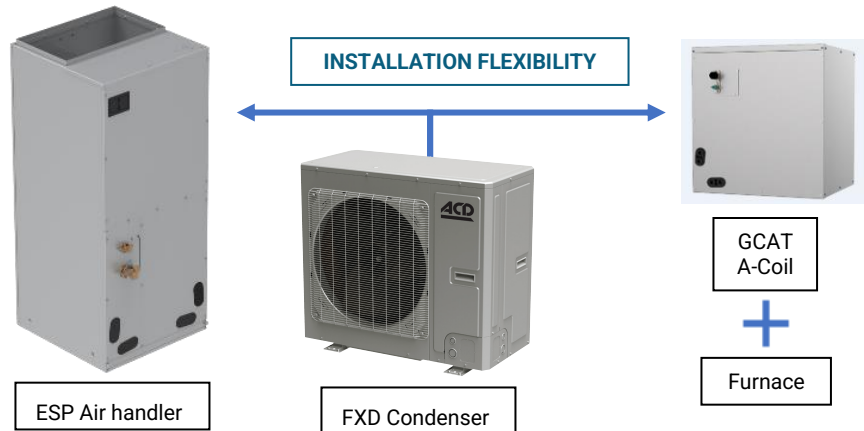

Features

Operation mode

- Cooling, heating, dehumidifying, fan and auto.

Nominal capacity

- 24000, 36000, 48000, 60000 BTU/hr.

Voltage

- 230/208V, 60 Hz, 1-phase.

Outdoor unit

- Variable speed rotary compressor (INVERTER), with overload protection.
- Electronic expansion valve (EEV) for precise control of refrigerant flow.
- Condenser fins covered with a hydrophilic coating for improved corrosion resistance.
- Large diameter quiet axial-flow fan for more efficient heat exchange.
- Smart pan heater to prevent ice formation.
- Compressor blanket and preheating technology.

Indoor unit: Air Handler

- Compact and space-saving design.
- Compatible with most standard 24V thermostats on the market.

Indoor unit: A-Coil Connection piping

- Can be matched with third-party furnace or blower.
- Minimum piping length of 24.6 ft. (7.5 m).
- Flared connections.

Control

- Operating temperature:
 - Cooling: 5 to 129 °F (-15 to 54 °C).
 - Heating: -22 to 75 °F (-30 to 24°C).
- Temperature display format: °C or °F.

Warranty

- 10-year basic warranty on parts and 10-year basic warranty on the compressor (labour not included).



Self-diagnosis



Comprehensive protection



High ESP



Wide operation range



High efficiency



Intelligent defrosting



Energy saving function



Flexible connecting pipe available



optional GREE thermostat XE70




FXD OUTDOOR UNIT + AIR HANDLER

Product #	Outdoor Unit		FXD-ACD36		FXD-ACD60	
	Indoor Unit		AH224	AH236	AH248	AH260
Qty						
TECHNICAL PERFORMANCE						
Power supply		V / Ph / Hz	208-230 / 1 / 60			
Cooling capacity	Nominal	BTU/hr	24000	36000	48000	54000
	Min. – max.	W (BTU/hr)	3517 - 7034 (12000 - 24000)	5275 - 10844 (18000 - 37000)	9964 - 14067 (34000 - 48000)	10257 - 15826 (35000 - 54000)
Heating capacity	Nominal	BTU/hr	24000	36000	48000	54000
	Min. – max.	W (BTU/hr)	3517 - 8792 (12000-30000)	5275 - 11137 (18000-38000)	9964 - 15240 (34000 - 52000)	10257 - 17584 (35000 - 60000)
SEER2	-		17	16	17	16
HSPF2	-		9	9	9	9
EER2	-		12	10	11	10
COP at -15°C (5°F)	W/W		1.8	1.8	1.8	1.8
COP at 8°C (47°F)	W/W		4	3	3.3	3.5
AHRI certification	-		206249116	206249117	206249119	206249118
ENERGY STAR	-		✓	-	-	-
INDOOR UNIT						
Dehumidification	pt/hr (l/hr)		3.06 (1.45)	9.70 (4.60)	9.94 (4.70)	12.13 (5.74)
Air flow volume	CFM		940	1000	1470	1600
Sound Pressure Level	dB (A)		45	47	50	51
MCA	A		4	4	8	8
MOCP	A		15	15	15	15
External Dimension (W x H x D)	in (mm)	21-1/4 x 48-1/4 x 21-1/4 (540 x 1225 x 540)	21-1/4 x 48-1/4 x 21-1/4 (540 x 1225 x 540)	24-3/4 x 57 x 21-1/4 (630 x 1450 x 540)	24-3/4 x 57 x 21-1/4 (630 x 1450 x 540)	27-5/16 x 59-3/8 x 26 (695 x 1510 x 660)
Package Dimension (W x H x D)	in (mm)	26 x 50-7/16 x 23-3/4 (660 x 1280 x 605)	26 x 50-7/16 x 23-3/4 (660 x 1280 x 605)	27-5/16 x 59-3/8 x 26 (695 x 1510 x 660)	27-5/16 x 59-3/8 x 26 (695 x 1510 x 660)	27-5/16 x 59-3/8 x 26 (695 x 1510 x 660)
Net weight	lb (kg)		156 (71)	156 (71)	202 (92)	202 (92)
Gross Weight	lb (kg)		169 (77)	169 (77)	218 (99)	218 (99)
OUTDOOR UNIT						
Sound pressure level	dB (A)		55 (45 - 56)	57 (45 - 57)	58 (48 - 61)	58 (48 - 61)
MCA	A		24	24	35	35
MOCP	A		35	35	45	45
Fan motor power output	A		1.5	1.5	1.5 x 2	1.5 x 2
Refrigerant volume (R410A)	kg (oz)		4.2 (148)	4.2 (148)	6.2 (220.5)	6.2 (220.5)
Operating ambient temperature	Cooling	°F (°C)	5 to 129 (-15 to 54)			
	Heating	°F (°C)	-22 to 75 (-30 to 24)			
External Dimension (W x H x D)	in (mm)	37 x 32-1/4 x 18-1/8 (940 x 820 x 460)	37 x 32-1/4 x 18-1/8 (940 x 820 x 460)	39-3/8 x 53-5/8 x 14-1/2 (1000 x 1365 x 368)	39-3/8 x 53-5/8 x 14-1/2 (1000 x 1365 x 368)	45-7/16 x 59-1/4 x 19-7/16 (1154 x 1505 x 494)
Package Dimension (W x H x D)	in (mm)	42-11/16 x 38-3/8 x 22-9/16 (1085 x 975 x 575)	42-11/16 x 38-3/8 x 22-9/16 (1085 x 975 x 575)	45-7/16 x 59-1/4 x 19-7/16 (1154 x 1505 x 494)	45-7/16 x 59-1/4 x 19-7/16 (1154 x 1505 x 494)	45-7/16 x 59-1/4 x 19-7/16 (1154 x 1505 x 494)
Net weight	lb (kg)		217 (98.5)	217 (98.5)	308 (140)	308 (140)
Gross Weight	lb (kg)		240 (109)	240 (109)	337 (153)	337 (153)
CONNECTION PIPING / REFRIGERANT						
Additional refrigerant charge	oz/ft. (g/m)		0.32 (29)	0.32 (29)	0.32 (29)	0.32 (29)
Connection pipes outer diameter	Liquid	in.	3/8	3/8	3/8	3/8
	Gas	in.	3/4	3/4	3/4	3/4
Pre-charge length	ft. (m)		31 (9.5)	31 (9.5)	31 (9.5)	31 (9.5)
Maximum pipe length between outdoor and indoor units	ft (m)		164 (50)	164 (50)	100 (30)	100 (30)
Maximum height between outdoor and indoor units	ft (m)		100 (30)	100 (30)	50 (15)	50 (15)


Dimensions

Outdoor Unit

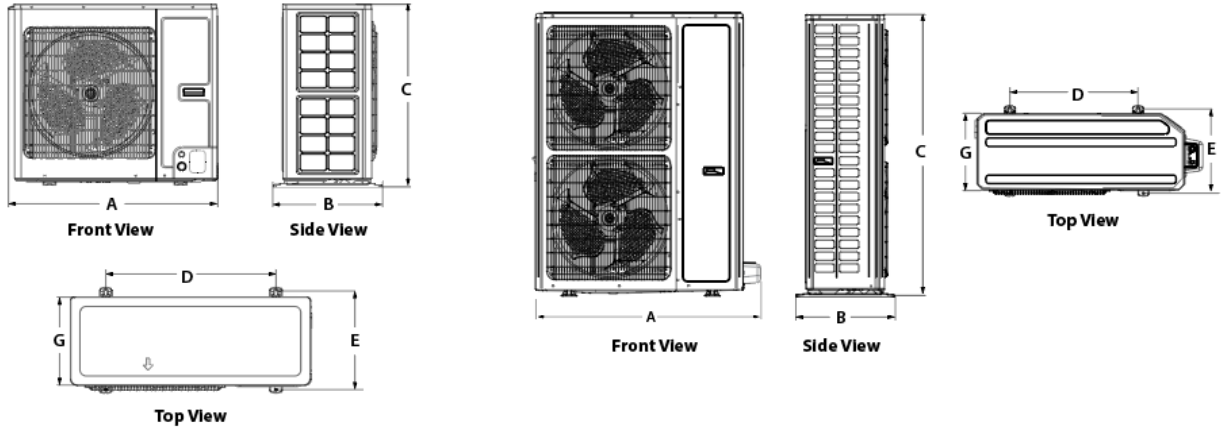

Outdoor Unit	A		B		C		D		E		G	
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
FXD-ACD36	37	940	20 1/8	510	32 1/4	820	24	610	19 1/8	485	18 1/8	460
FXD-ACD60	42 3/4	1085	16 7/8	430	53 3/4	1365	24 3/8	620	15 5/8	400	14 1/2	370

Indoor Unit: Air Handler

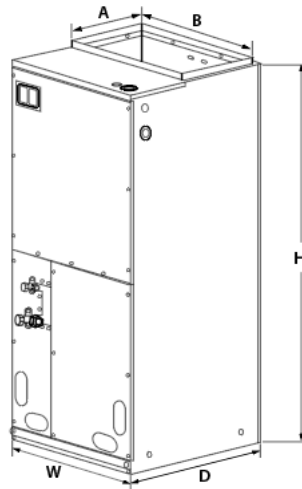


Air handler	W		D		H		A		B	
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
AH224	21 1/4	540	21 1/4	540	48 1/4	1225	11 5/8	295	20	508
AH236										
AH248	24 3/4	630	21 1/4	540	57	1448	11 5/8	295	20	508
AH260										



FAN PERFORMANCE


AH224 Air Handler + FXD-ACD36 Compressor

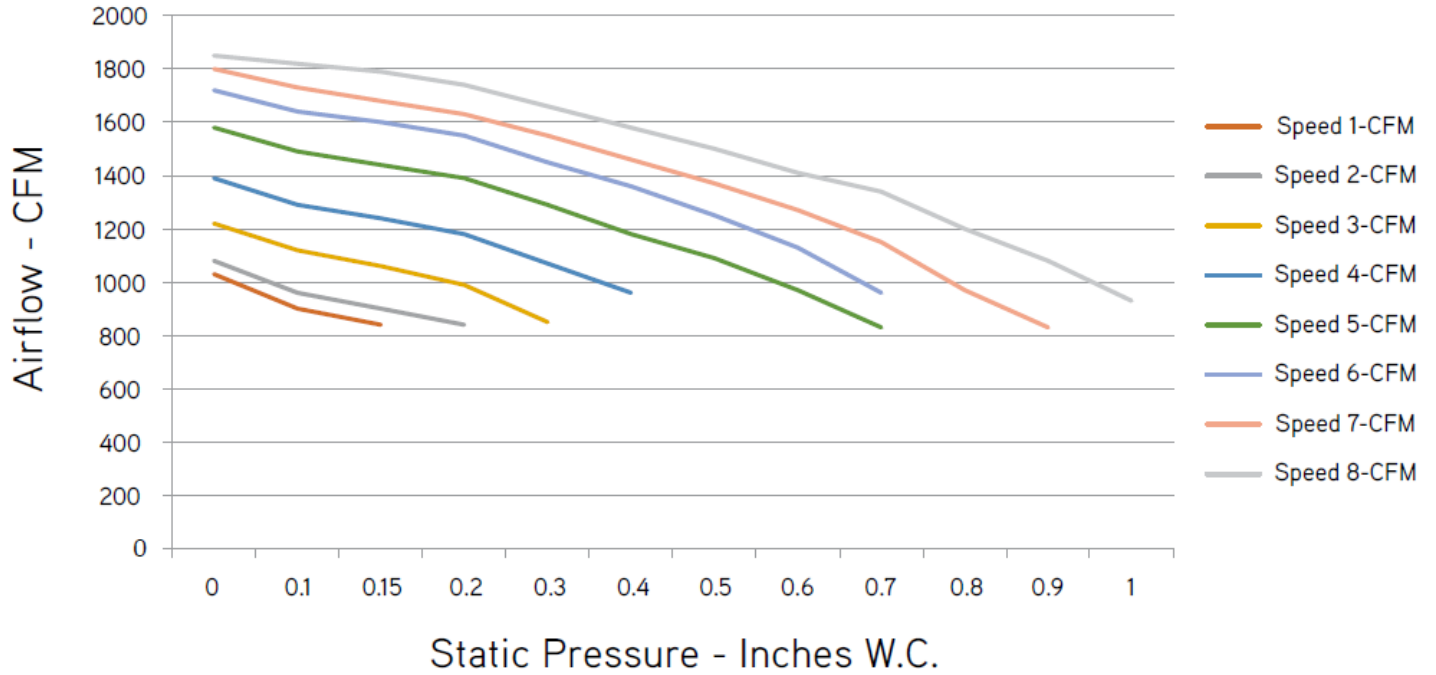

STATIC PRESSURE Inches W.C.	0	0.1	0.15	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
Speed 1 - CFM	1030	900	840									
Speed 2 - CFM	1080	960	900	840								
Speed 3 - CFM	1220	1120	1060	990	850							
Speed 4 - CFM	1390	1290	1240	1180	1070	960						
Speed 5 - CFM	1580	1490	1440	1390	1290	1180	1090	970	830			
Speed 6 - CFM	1720	1640	1600	1550	1450	1360	1250	1130	960			
Speed 7 - CFM	1800	1730	1680	1630	1550	1460	1370	1270	1150	970	830	
Speed 8 - CFM	1850	1820	1790	1740	1660	1580	1500	1410	1340	1200	1080	930




AH236 Air Handler + FXD-ACD36 Compressor

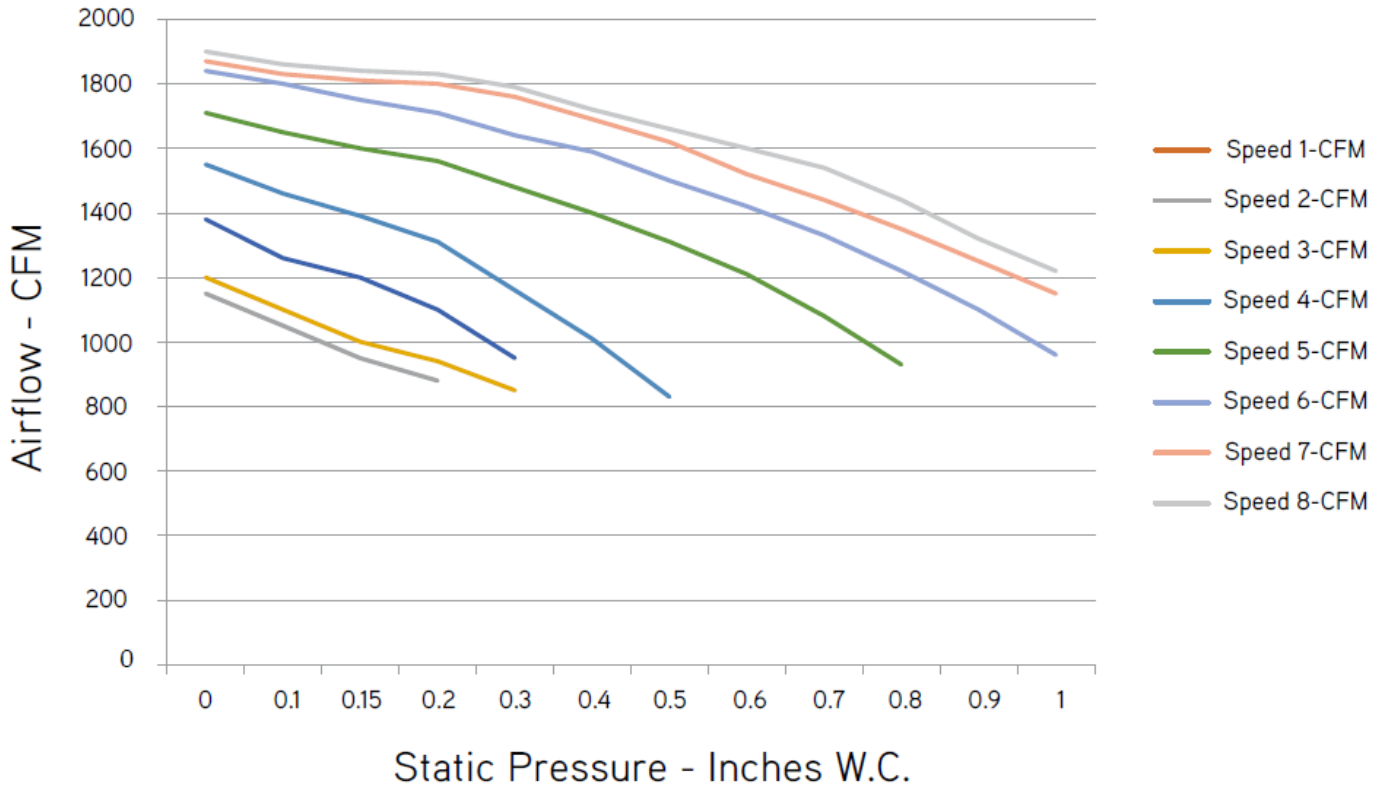

STATIC PRESSURE Inches W.C.	0	0.1	0.15	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
Speed 1 - CFM	1150	1050	950	880								
Speed 2 - CFM	1200	1100	1000	940	850							
Speed 3 - CFM	1380	1260	1200	1100	950							
Speed 4 - CFM	1550	1460	1390	1310	1160	1010	830					
Speed 5 - CFM	1710	1650	1600	1560	1480	1400	1310	1210	1080	930		
Speed 6 - CFM	1840	1800	1750	1710	1640	1590	1500	1420	1330	1220	1100	960
Speed 7 - CFM	1870	1830	1810	1800	1760	1690	1620	1520	1440	1350	1250	1150
Speed 8 - CFM	1900	1860	1840	1830	1790	1720	1660	1600	1540	1440	1320	1220




AH248 Air Handler + FXD-ACD60 Compressor

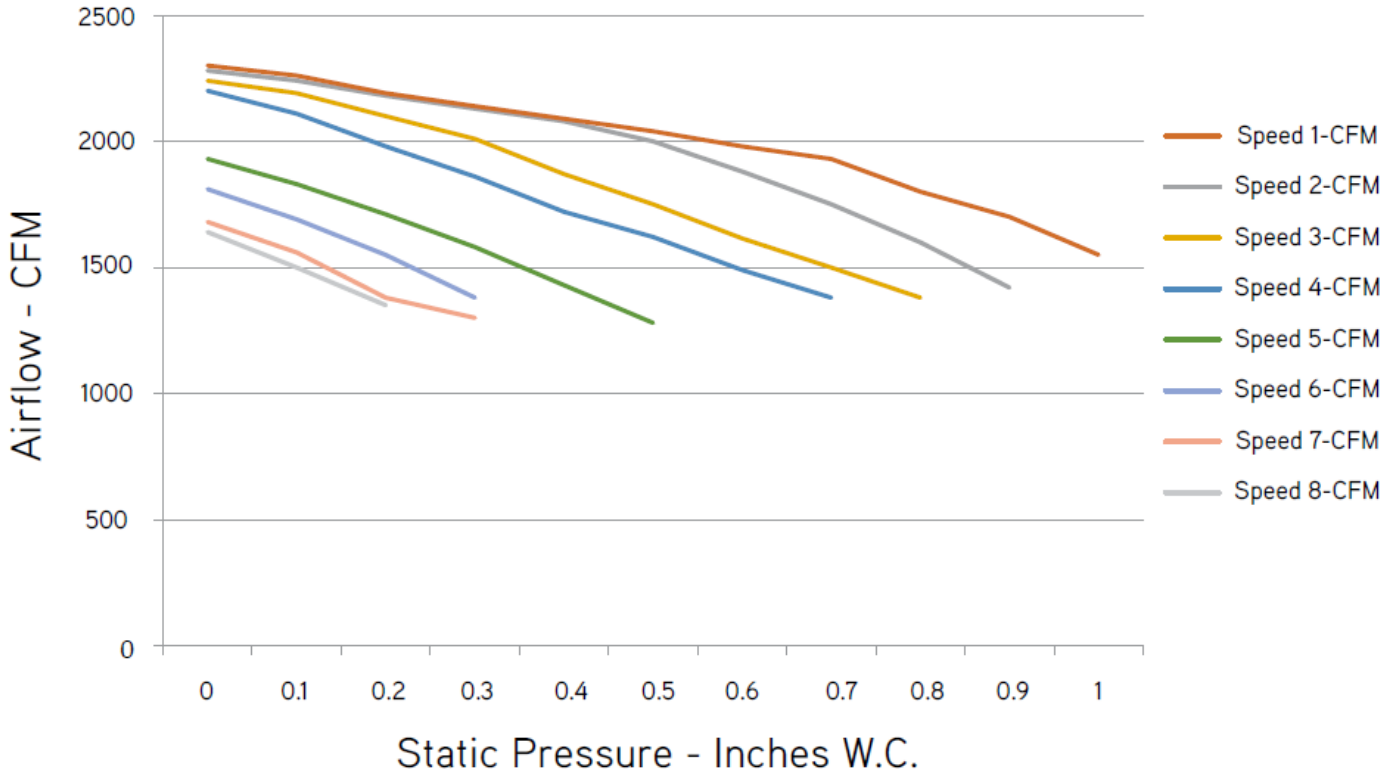

STATIC PRESSURE Inches W.C.	0	0.1	0.15	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
Speed 1 - CFM	1640	1500	1450	1350								
Speed 2 - CFM	1680	1560	1500	1380	1300							
Speed 3 - CFM	1810	1690	1620	1550	1380							
Speed 4 - CFM	1930	1830	1770	1710	1580	1430	1280					
Speed 5 - CFM	2200	2110	2040	1980	1860	1720	1620	1490	1380			
Speed 6 - CFM	2240	2190	2145	2100	2010	1870	1750	1615	1500	1380		
Speed 7 - CFM	2280	2240	2200	2180	2130	2080	2000	1880	1750	1600	1420	1150
Speed 8 - CFM	2300	2260	2220	2190	2140	2090	2040	1980	1930	1800	1700	1550



AH260Air Handler + FXD-ACD60 Compressor

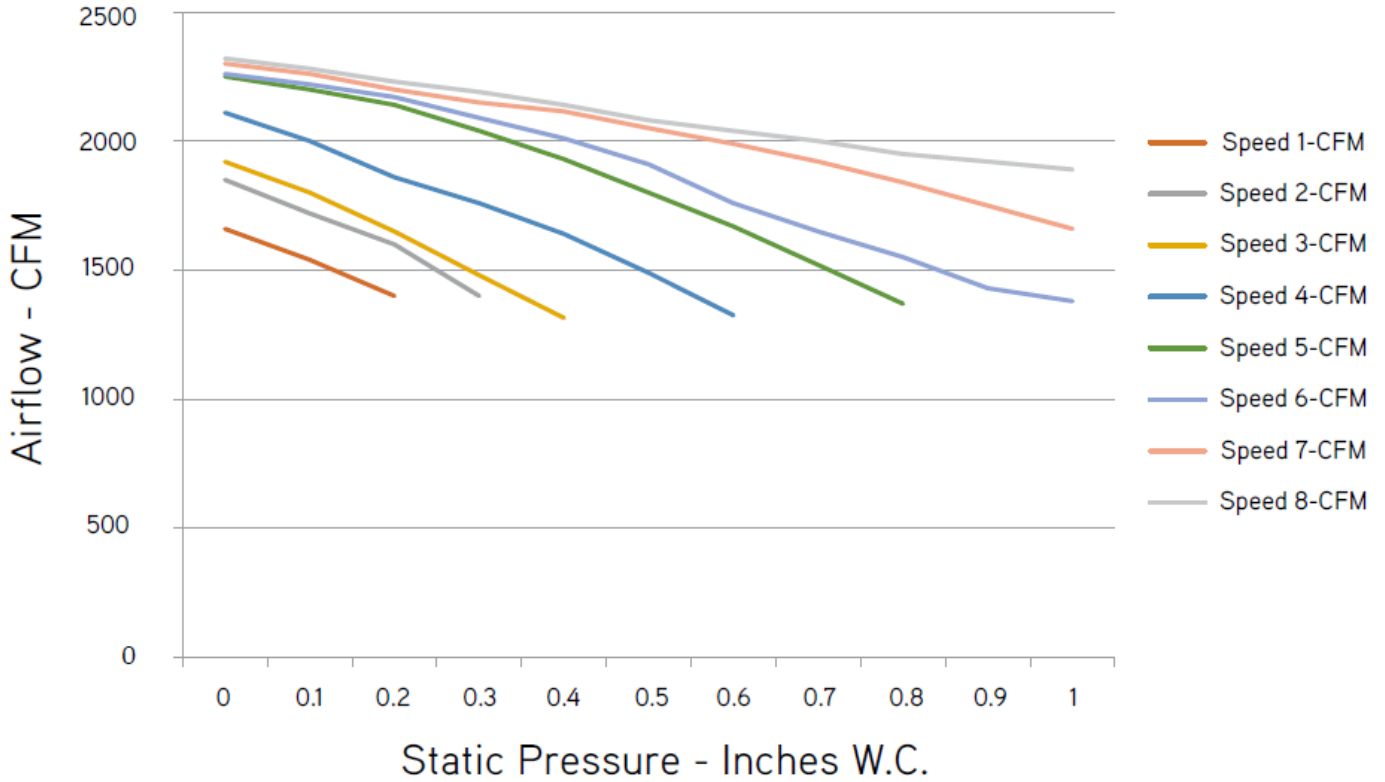


STATIC PRESSURE Inches W.C.	0	0.1	0.15	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
Speed 1 - CFM	1660	1540	1470	1400								
Speed 2 - CFM	1850	1720	1650	1600	1400							
Speed 3 - CFM	1920	1800	1730	1650	1480	1315						
Speed 4 - CFM	2110	2000	1950	1860	1760	1640	1490	1325				
Speed 5 - CFM	2250	2200	2190	2140	2040	1930	1800	1670	1520	1370		
Speed 6 - CFM	2260	2220	2200	2170	2090	2010	1910	1760	1650	1550	1430	1380
Speed 7 - CFM	2300	2260	2230	2200	2150	2115	2050	1990	1920	1840	1750	1660
Speed 8 - CFM	2320	2280	2250	2230	2190	2140	2080	2040	2000	1950	1920	1890



GUD OUTDOOR UNIT WITH GCAT A-COIL

PRODUCT #	Indoor Unit	GCAT24F/NAA	GCAT36F/NAA	GCAT48H/NAA	GCAT60H/NAA	
	Outdoor Unit	GUD36W/A-D(U)		GUD60W/A-D(U)		
Qty						
TECHNICAL PERFORMANCE						
Power supply	V / Ph / Hz	208-230 / 1 / 60				
Cooling capacity	Nominal	W (BTU/hr)	24000	36000	48000	54000
	Min. – max.	W (BTU/hr)	3517 - 7034 (12000 - 24000)	5275 - 10844 (18000 - 37000)	9964 - 14067 (34000 - 48000)	10257 - 15826 (35000 - 54000)
Heating capacity	Nominal	W (BTU/hr)	24000	36000	48000	54000
	Min. – max.	W (BTU/hr)	3517 - 8792 (12000-30000)	5275 - 11137 (18000-38000)	9964 - 15240 (34000 - 52000)	10257 - 17584 (35000 - 60000)
SEER2	-	15.2	15.2	15.2	15.2	
HSPF2	-	8.5	8.5	8.5	8.5	
EER2	W/W	11	9.5	10	9.5	
COP at -15°C (5°F)	W/W	1.8	1.8	1.8	1.8	
COP at 8°C (47°F)	W/W	4.2	3.5	3.6	3.5	
AHRI number	-	211644150	211644151	211644152	211644153	
Energy Star	-	YES	NO	NO	NO	
INDOOR UNIT						
Dehumidification	L/hr (pt/hr)	2.85 (6.03)	4.58 (9.68)	4.70 (9.94)	5.74 (12.13)	
Air flow volume (Max)	CFM	800	1000	1230	1510	
External Dimension (W x H x D)	in (mm)	17-1/2 x 23 x 21-1/4 (445 x 585 x 540)	17-1/2 x 23 x 21-1/4 (445 x 585 x 540)	24-1/2 x 28-1/2 x 21-1/4 (622 x 725 x 540)	24-1/2 x 28-1/2 x 21-1/4 (622 x 725 x 540)	
Package Dimension (W x H x D)	in (mm)	21 x 25-13/16 x 27-1/8 (535 x 655 x 690)	21 x 25-13/16 x 27-1/8 (535 x 655 x 690)	28-1/8 x 31-5/16 x 27-1/8 (714 x 795 x 689)	28-1/8 x 31-5/16 x 27-1/8 (714 x 795 x 689)	
Refrigerant charge	oz	8.8	8.8	8.8	8.8	
Net Weight	lb (kg)	64 (29)	64 (29)	95 (43)	95 (43)	
Gross Weight	lb (kg)	75 (34)	75 (34)	110 (50)	110 (50)	
OUTDOOR UNIT						
Sound Pressure level	dB (A)	55 (45 – 56)	57 (45 - 57)	58 (48 - 61)	58 (48 - 61)	
MCA	A	24	24	35	35	
MOCP	A	35	35	45	45	
Fan motor power input	W	1.5	1.5	1.5 x 2	1.5 x 2	
Refrigerant volume (R410A)	oz (kg)	148 (4.2)	148 (4.2)	220.5 (6.2)	220.5 (6.2)	
Operating ambient temperature	Cooling	°F (°C)	5 to 129 (-15 to 54)			
	Heating	°F (°C)	-22 to 75 (-30 to 24)			
External Dimension (W x H x D)	in (mm)	37 x 32-1/4 x 18-1/8 (945 x 820 x 460)	37 x 32-1/4 x 18-1/8 (945 x 820 x 460)	39-3/8 x 53-5/8 x 14-1/2 (1000 x 1365 x 368)	39-3/8 x 53-5/8 x 14-1/2 (1000 x 1365 x 368)	
Package Dimension (W x H x D)	in (mm)	42-11/16 x 38-3/8 x 22-9/16 (1085 x 975 x 575)	42-11/16 x 38-3/8 x 22-9/16 (1085 x 975 x 575)	45-7/16 x 59-1/4 x 19-7/16 (1154 x 1505 x 494)	45-7/16 x 59-1/4 x 19-7/16 (1154 x 1505 x 494)	
Net weight	lb (kg)	217 (98)	217 (98)	308 (140)	308 (140)	
Gross Weight	lb (kg)	240 (109)	240 (109)	337 (153)	337 (153)	
CONNECTION PIPING / REFRIGERANT						
Pre-charge length	ft. (m)	31 (9.5)	31 (9.5)	31 (9.5)	31 (9.5)	
Additional refrigerant charge	oz/ft. (g/m)	0.32 (29)	0.32 (29)	0.32 (29)	0.32 (29)	
Liquid pipe outer diameter	in.	3/8	3/8	3/8	3/8	
Gas pipe outer diameter	in.	3/4	3/4	3/4	3/4	
Maximum length between outdoor and indoor units	ft (m)	164 (50)	164 (50)	164 (50)	164 (50)	
Maximum pipe height between outdoor and indoor units	ft (m)	100 (30)	100 (30)	50 (15)	50 (15)	

Indoor Unit: A-Coil

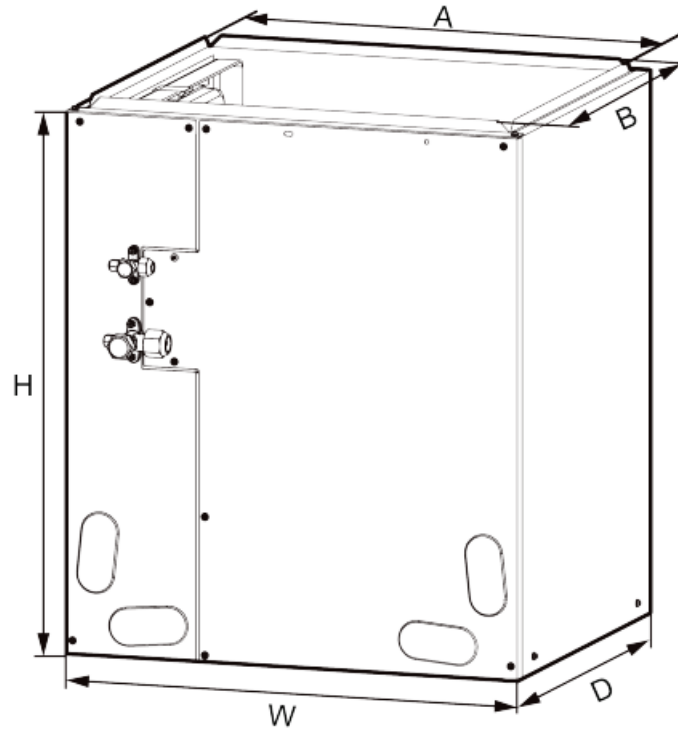

A-Coil	W		D		H		A		B	
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
GCAT24F/NAA	17 ½	445	21 1/4	540	23	585	15 7/8	405	19 3/8	492
GCAT36F/NAA										
GCAT48H/NAA	24 ½	622	21 1/4	540	28 ½	725	22 7/8	580	19 3/8	492
GCAT60H/NAA										



Approval Drawing

Specifications may change without prior notice

Project:	
Consultant Engineer:	
Electrical Contractor:	
Distributor:	
Date:	
Contact:	
Comments:	Approval Information